



DIN 933 - ISO 4017 - UNI 5739 Hex Bolts

DIN 933 - ISO 4017 - UNI 5739 Sechskantschrauben


DIN 933 - ISO 4017 - UNI 5739 Boulons hexagonaux

DIN 933 - ISO 4017 - UNI 5739 Vite a testa esagonale

DIN 933 - ISO 4017 - UNI 5739 Tornillo hexagonal

Quality: 4.6 / 4.8 / 5.6 / 5.8 / 6.8 / 8.8 / 10.9 / 12.9

Coating Type: Zinc Plated / Hot Dip Galvanized / Geomet / Black Oxide

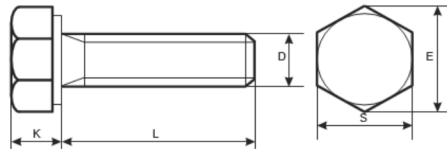

Size – D	Pitch (p)	E (Min.)	S (Min.)	S (Max.)	L	K (Min.)	K (Max.)
M8	1.25	14.38	12.57	13	FT	5.1	5.6
M10	1.5	17.77	15.57	16	FT	6.2	7
M12	1.75	20.03	17.57	18	FT	7.2	8
M16	2	26.17	23.16	24	FT	9.71	10.29
M18	2.5	29.56	26.16	27	FT	11.15	11.85
M20	2.5	32.95	29.16	30	FT	12.15	12.85
M22	2.5	37.29	33	34	FT	13.65	14.35
M24	3	39.55	35	36	FT	14.65	15.35
M27	3	45.2	40	41	FT	16.65	17.35
M30	3.5	50.85	45	46	FT	18.18	19.12
M33	3.5	55.37	49	50	FT	20.58	21.42
M36	4	60.79	53.8	55	FT	22.08	22.92
M39	4	66.44	58.8	60	FT	24.58	25.42
M42	4.5	71.3	63.1	65	FT	25.58	26.42
M45	4.5	76.95	68.1	70	FT	27.58	28.42
M48	5	82.6	73.1	75	FT	29.58	30.42
M52	5	88.25	78.1	80	FT	32.5	33.5
M56	5.5	93.56	82.8	85	FT	34.5	35.5
M60	5.5	99.21	87.8	90	FT	37.5	38.5
M64	6	104.86	92.8	95	FT	39.5	40.5